MODEL	HEIGHT(A±15)	DIA (D)	WEIGHT (±2%)	VOLUME (±1%)		
	mm (INCH)	mm (INCH)	KG	LITER (L)	US GALLON	CU FT
7296-6-6	2400.0 (94.49)	1800.0 (70.87)	305	3661.00	967.24	129.29
PARAMETERS						

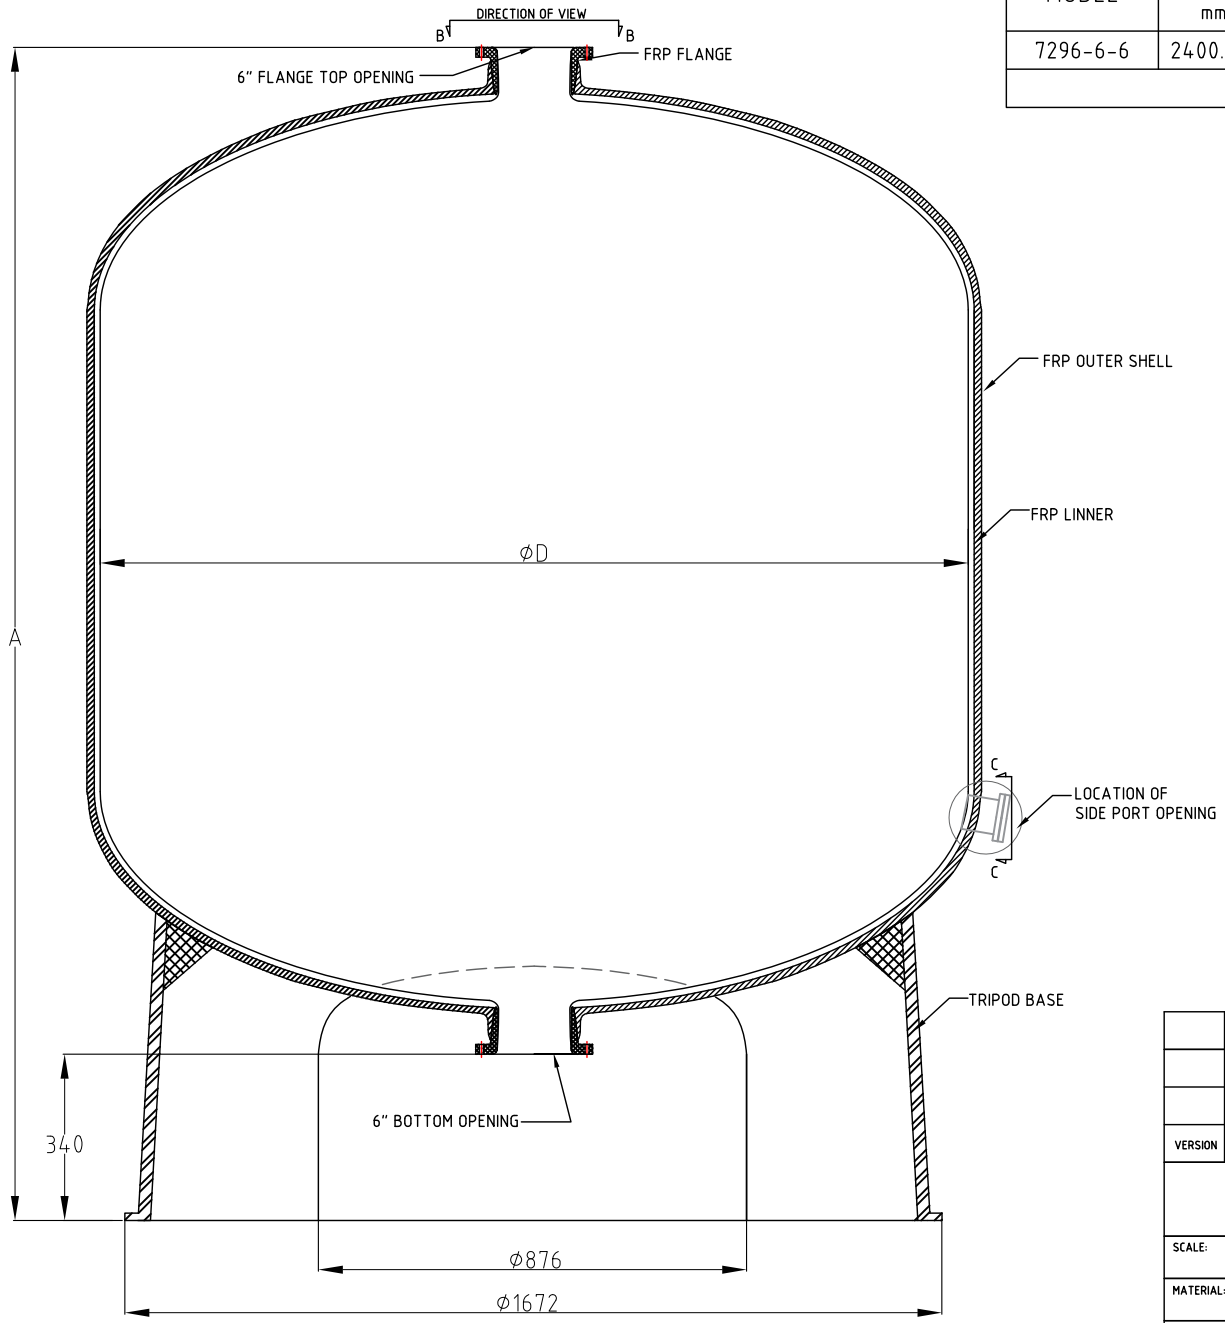



DIRECTION OF VIEW B-B
6" FLANGE DIMENSION



SIDE PORT OPENING VIEW C - C

NOTE:
1. OPERATING CONDITIONS:
   MAXIMUM WORKING PRESSURE: 100PSI (6.89 BAR)
   TEMPERATURE RANGE: 32°F - 131°F (0°C - 55°C)
   MAXIMUM VACUUM: 5"Hg (127mmHg)
2. TANK INSPECTION STANDARD
   2.1. NO MORE THAN 5 INTERNAL AND EXTERNAL BURST DEBRIS.
   2.2. NO INTERNAL OR EXTERNAL DEBRIS OR BURNS LARGER THAN 3MM.
3. ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECTED TO CHANGE WITHOUT NOTICE.
4. FACTORY STANDARD
   4.1 HYDRO-STATIC TEST PRESSURE: 10.5BAR FOR 30 MINUTES BEFORE DELIVERY
   4.2 VESSEL DESIGNED, MADE, TEST ACCORDING TO STANDARD HY/T067-2002 FOR WATER TREATMENT FRP PRESSURE VESSEL
5. DO NOT USED FOR CORROSIVE LIQUID
6. DN110 SIDE PORT OPENING OPTION FOR MEDIA REMOVAL -

VERSION	MODIFICATION DESCRIPTION

PURELINE® WATER SOLUTIONS

SCALE: 1:2.5	QUANTITY: N/A	SIGNATURE:	MODEL: 7296" FRP PRESSURE TANK
MATERIAL: FRP	P/N: N/A	NAME: / DATE:	DESCRIPTION: 1.8 METER DIAMETER 6" FLANGE TOP/BOTTOM OPENING
PROJECTION:	UNLESS OR OTHERWISE SPECIFIED, ALL DIMENSION ARE IN mm. DIMENSION TOLERANCE 2 DECIMAL ±0.01, 1 DECIMAL ±0.1, DECIMAL ±1, ANGLE 1°	DESIGN: / REVIEW: / APPROVAL:	
UNIT: mm		DRAWING NO.: 20106	REVISION: 0 — SHEET NO.: 1 OF 1