


STAINLESS STEEL SUS 304 GROOVED END COUPLINGS

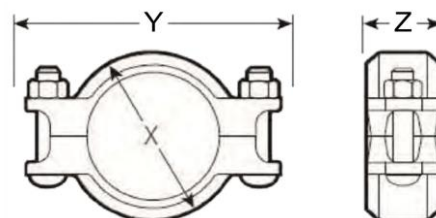

Model	Housing Material / Rubber Gasket	Nominal Size (mm/inch)	Pipe O.D. (mm/inch)	Dimension X (mm)	Dimension Y (mm)	Dimension Z (mm)
SSGC-DN40	SUS 304 / EPDM	40 / 1.5	48.3/1.90	67	107	43
SSGC-DN50	SUS 304 / EPDM	50 / 2.0	60.3/2.37	79	118	43
SSGC-DN65	SUS 304 / EPDM	65 / 2.5	76.1/3.00	95	135	44
SSGC-DN80	SUS 304 / EPDM	80 / 3.0	88.9/3.50	110	151	45

Maximum Working Pressure

Up to 600 psi/ 42 Bar

Working pressure dependent on material, wall thickness and size of pipe.

Application

Joins standard roll or cut grooved pipe and standard grooved-end fittings, valves and accessories.

Housing Materials:

Type 304 Stainless Steel to ASTM F-593

Bolts & Nuts:

Type 304 Stainless Steel track bolts and nuts to ASTM F-593

Rubber Gaskets or seals:

The gasket seals is C-shaped, made of standard gasket EPDM (Ethylene Propylene Diene Monomer) for cold water, hot water, rare acid, oil free air and multiple chemical product (-34~150°C). It is not suitable for medium like petroleum