



PureLine Stainless Steel Bag Filter Housings **(Clamp Type)**

PureLine Stainless steel Bag filter Housings are economical entry-level units designed for commercial and general-purpose filtration.

They combine lightweight construction with low pressure drop for efficient operation.

Key Features:

Material: 100% stainless steel for corrosion resistance and durability

Closure: Clamp closure with threaded coupling for quick and easy maintenance

Design: Adjustable mounting-leg module for flexible installation height

Performance: Consistent filtration efficiency across a wide range of applications



Applications

Inks & Polymers Filtration, Paints & Lacquer Filtration, Chemicals, Petrochemicals, Electronics, Waste Water Treatment, Food & Beverage, Pharmaceuticals, Pre RO/DI

Specifications

Maximum Operating Temperature : 75°C (167°F) (Base on selection of filter element and O-ring material.)


Maximum Operating Pressure : 7 bar at 75°C (100 psi at 167°F)

Materials : SUS 304 , SUS 316L

Stainless Steel Bag Filter Housings

Standard Specification

Model	A	B	C	D	E	In/Out
BFL-2	200	90	65	960	161	2"

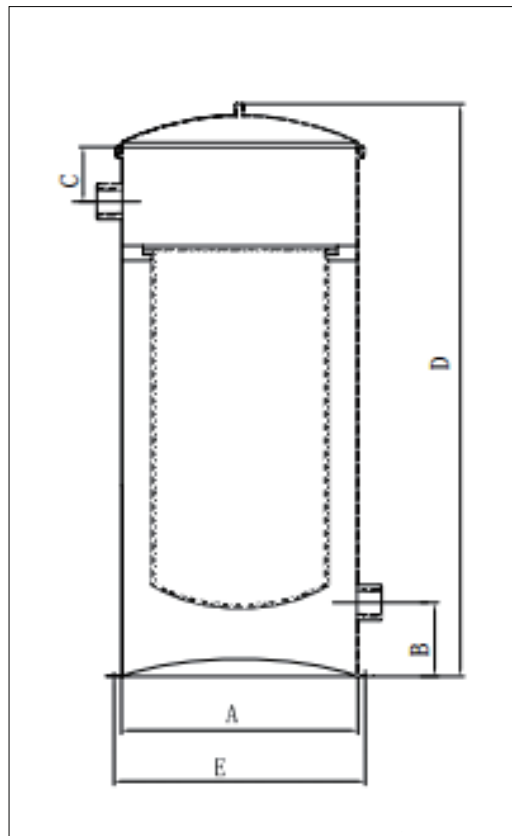

Bag Filter

Model	Bag Size	Micron
BF - 1	7" x 32"	1 Micron
BF - 5	7" x 32"	5 Micron
BF - 25	7" x 32"	25 Micron
BF - 50	7" x 32"	50 Micron

